



G150XVN01.0

() Preliminary Specification

(V) Final Specification

Module	15" XGA TFT-LCD Module	
Model Name	G150XVN01.0	

Customer	Date
Approved by	
Note: This Specification is notice.	s subject to change without

Checked & Approved by	Date					
Vito Huang	02/05/2014					
Prepared by	Date					
Vivian Huang	02/05/2013					
Audio-Video Display Business Unit / AU Optronics corporation						





G150XVN01.0

AU OPTRONICS CORPORATION

Contents

1. Handling Precautions	4
2. General Description	5
2.1 Display Characteristics	5
2.2 Optical Characteristics	6
3. Functional Block Diagram	9
4. Absolute Maximum Ratings	10
4.1 TFT LCD Module	
4.2 Absolute Ratings of Environment	
5. Electrical characteristics	11
5.1 TFT LCD Module	
6. Signal Characteristic	
6.1 Pixel Format Image	
6.2 The Input Data Format	15
6.3 Signal Description	16
6.4 Interface Timing	17
6.5 Power ON/OFF Sequence	
7. Connector & Pin Assignment	
7.1 Connector	
7.2 Pin Assignmtne	
8. Reliability Test	
9. Shipping Label	
10. Packing Form	
10.1 Packaging Material	23
10.2 Packing Instruction	23
10.3 Palletizing	
11. Outline Drawing	25





G150XVN01.0

Record of Revision

Vers	sion & Date	Page	Old Description	New Description	Remark
0.0	2013/03/07	All	Frist Draft		
1.0	2014/02/05			Update 2.1 Display Characteristics	
				Update 2.2 Optical Characteristics	
				Update 5.1.1 Power Specification	
				Update 5.1.3 Backlight Unit	
				Update 8. Reliability Test	
				Update 10.2 Packing instruction	
				Update 10.3 Palletizing	
				Update 11. Outline Drawing	





G150XVN01.0

AU OPTRONICS CORPORATION

1. Handling Precautions

- 1) Since front polarizer is easily damaged, please be cautious and not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or soft cloth.
- 5) Since the panel is made of glass, it may be broken or cracked if dropped or bumped on hard surface.
- 6) To avoid ESD (Electro Static Discharde) damage, be sure to ground yourself before handling TFT-LCD Module.
- 7) Do not open nor modify the module assembly.
- 8) Do not press the reflector sheet at the back of the module to any direction.
- 9) In case if a module has to be put back into the packing container slot after it was taken out from the container, do not press the center of the LED light bar edge. Instead, press at the far ends of the LED light bar edge softly. Otherwise the TFT Module may be damaged.
- 10) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
- 11) TFT-LCD Module is not allowed to be twisted & bent even force is added on module in a very short time. Please design your display product well to avoid external force applying to module by end-user directly.
- 12) Small amount of materials without flammability grade are used in the TFT-LCD module. The TFT-LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950 or UL1950), or be applied exemption.
- 13) Severe temperature condition may result in different luminance, response time and lamp ignition voltage.
- 14) Continuous operating TFT-LCD display under low temperature environment may accelerate lamp exhaustion and reduce luminance dramatically.
- 15) The data on this specification sheet is applicable when LCD module is placed in landscape position.
- 16) Continuous displaying fixed pattern may induce image sticking. It's recommended to use screen saver or shuffle content periodically if fixed pattern is displayed on the screen.





G150XVN01.0

AU OPTRONICS CORPORATION

2. General Description

G150XVN01.0 is a Color Active Matrix Liquid Crystal Display composed of a TFT-LCD panel, a driver circuit, and a backlight system. The screen format is intended to support the XGA (1024(H) x 768(V)) screen and 16.2M colors. All input signal is one channel LVDS interface.

2.1 Display Characteristics

The following items are characteristics summary on the table under 25 $^{\circ}\mathrm{C}$ condition:

Items	Unit	Specifications
Screen Diagonal	[inch]	15.0"
Active Area	[mm]	304.128 (H) x 228.096 (V)
Pixels H x V		1024 x 768
Pixel Pitch	[mm]	0.297 (per one triad) x 0.297
Pixel Arrangement		R.G.B. Vertical Stripe
Display Mode		VA, Normally Black
White Luminance	[cd/m ²]	300 (center, Typ)
Contrast Ratio		1500 : 1 (Typ)
Optical ResponseTime	[msec]	35 (Typ, on/off)
Nominal Input Voltage VDD	[Volt]	+3.3
Power Consumption	[Watt]	15 (Typ)
Weight	[Grams]	950 (Max)
Physical Size (H x V x D)	[mm]	326.5 (H) x 253.5 (V) x 9.6(D) (Typ)
Electrical Interface		one channel LVDS
Surface Treatment		Hard-coating (3H), Anti-Glare treatment
Support Color		16.2M / 262K colors
Temperature Range Operating Storage (Non-Operating)	[°C]	-10 to +70 (Tgs) -30 to +70 (Ta)
RoHS Compliance		RoHS Compliance





G150XVN01.0

2.2 Optical Characteristics

The optical characteristics are measured under stable conditions at 25[°]ℂ (Room Temperature).

ltem	Unit	Con	ditions	Min.	Тур.	Max.	Note
Viewing Angle	[degree]	Horizontal CR = 10	(Right) (Left)	80 80	89 89	-	1
viewing Angle	[degree]	Vertical CR = 10	(Up) (Down)	80 80	89 89	-	
Contrast Ratio		Normal Direc	tion	900	1500		
		Raising Time	(TrR)	-	20	-	/
Optical Response Time	[msec]	Falling Time	(TrF)	-	15)-	2
		Rising + Falli	ng	- 1	35	-	
		Red x		0.585	0.635	0.685	
		Red y		0.295	0.345	0.395	
		Green x		0.268	0.318	0.368	
Color / Chromaticity Coordinates		Green y		0.575	0.625	0.675	
(CIE)		Blue x		0.100	0.150	0.200	
		Blue y		0.019	0.069	0.119	
		White x		0.250	0.300	0.350	
		White y		0.275	0.325	0.375	
Central Luminance	[cd/m ²]			240	300	-	3
Luminance Uniformity	[%]	5 Points		75	-	-	4,5
NTSC	%			-	72	-	

Optical Equipment: BM-5A, BM-7, PR880, or equivalent






G150XVN01.0


Note 1: Definition of viewing angle

Viewing angle is the measurement of contrast ratio≥10, or ≥5, at the screen center, over a 180° horizontal and 180° vertical range (off-normal viewing angles). The 180° viewing angle range is broken down as follows; 90° (θ) horizontal left and right and 90° (Φ) vertical, high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated about its center to develop the desired measurement viewing angle.

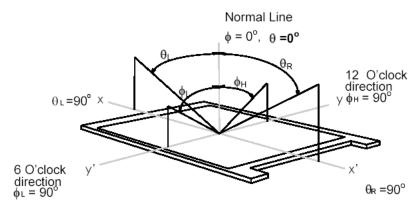

Note 2: Definition of response time:

The output signals of photo detector are measured when the input signals are changed from "Full Black" to "Full White" (rising time), and from "Full White" to "Full Black" (falling time), respectively. The response time is interval between the 10% and 90% of amplitudes. Please refer to the figure as below.

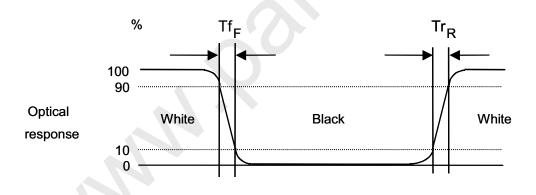






G150XVN01.0


AU OPTRONICS CORPORATION

Note 3: Measurement method

The LCD module should be stabilized at given temperature for 30 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 30 minutes in a stable, windless and dark room.

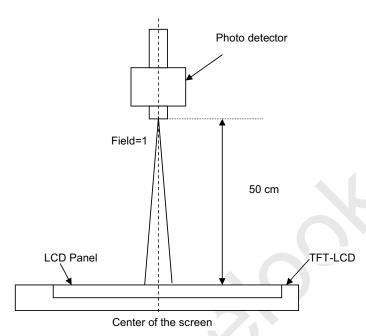

Note 4: 5 points position

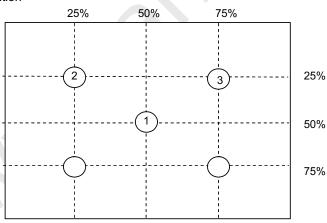

Note 5: Uniformity =
$$\frac{\text{Minimum Luminance in 5 points (1-5)}}{\text{Maximum Luminance in 5 Points (1-5)}}$$






G150XVN01.0

3. Functional Block Diagram

The following diagram shows the functional block of the 15.0 inches wide Color TFT-LCD Module:

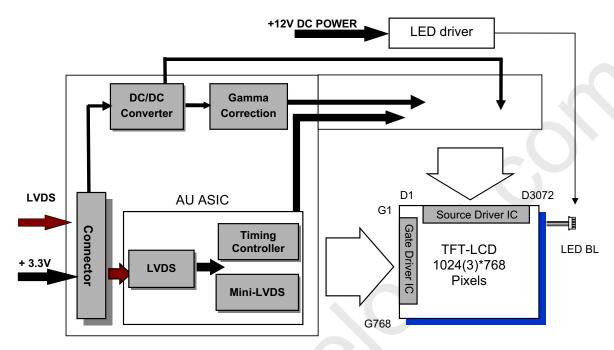



G150XVN01.0

AU OPTRONICS CORPORATION

4. Absolute Maximum Ratings

Absolute maximum ratings of the module are as following:

4.1 TFT LCD Module

Item	Symbol	Min	Max	Unit	Conditions
Logic/LCD Drive Voltage	VDD	-0.3	+4.0	[Volt]	Note 1,2

4.2 Absolute Ratings of Environment

Item	Symbol	Min.	Max.	Unit	Conditions
Operating Temperature (Tgs)	TOP	-10	+70	[°C]	Note 3
Operation Humidity	HOP	5	95	[%RH]	Note 3
Storage Temperature (Ta)	TST	-30	+70	[°C]	
Storage Humidity	HST	5	95	[%RH]	


Note 1: With in Ta (25°C)

Note 2: Permanent damage to the device may occur if exceeding maximum values

Note 3: Temperature and relative humidity range are shown as the below figure.

- 1. 95% RH Max (Ta $\leq 39^{\circ}$ C)
- 2. Max wet-bulb temperature at 39 $^{\circ}$ C or less. (Ta \leq 39 $^{\circ}$ C)
- 3. No condensation

Note 4: Function Judged only

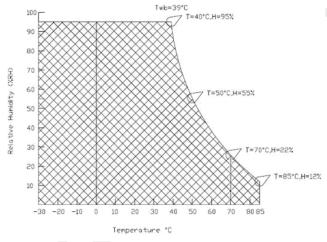

document version 1.0

10/25





G150XVN01.0

AU OPTRONICS CORPORATION

5. Electrical characteristics

5.1 TFT LCD Module


5.1.1 Power Specification

Input power specifications are as follows:

Symbol	Parameter	Min	Тур	Max	Unit	Conditions
VDD	Logic/LCD Drive Voltage	3.0	3.3	3.6	[Volt]	+/-10%
IDD	Input Current	-	530	700	[mA]	VDD= 3.3V, All White Pattern At 60Hz,
PDD	VDD Power	-	1.75	-	[Watt]	VDD= 3.3V, All White Pattern At 60Hz
IRush	Inrush Current	-	-	2	[A]	Note 1
VDDrp	Allowable Logic/LCD Drive Ripple Voltage	-	-	500	[mV] p-p	VDD= 3.3V, All White Pattern At 60Hz

Note 1: Measurement conditions:

The duration of rising time of power input is 500us.

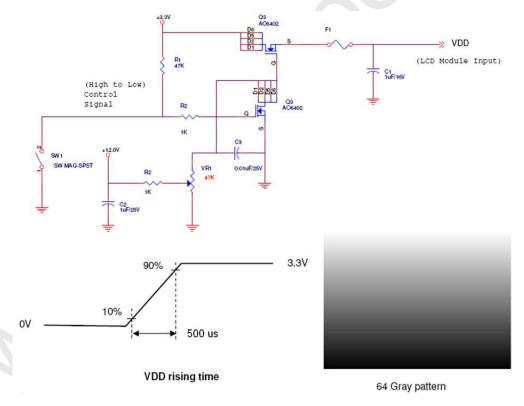

document version 1.0 11/25





G150XVN01.0

AU OPTRONICS CORPORATION

5.1.2 Signal Electrical Characteristics


Input signals shall be low or Hi-Z state when VDD is off.

Each signal characteristics are as follows;


Symbol	Parameter	Min	Тур	Max	Units	Condition
V _{TH}	Differential Input High Threshold	-	1	+100	[mV]	V _{CM} = 1.2V Note 1
V _{TL}	Differential Input Low Threshold	-100	-	-	[mV]	V _{CM} = 1.2V Note 1
V _{ID}	Input Differential Voltage	100	400	600	[mV]	Note 1
V _{CM}	Differential Input Common Mode Voltage	+1.1	-	+1.45	[V]	V _{TH} -V _{TL} = 200mV (max) Note 1

Note1: LVDS Signal Waveform



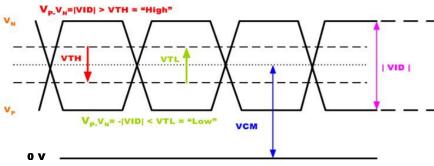

Differential Signal

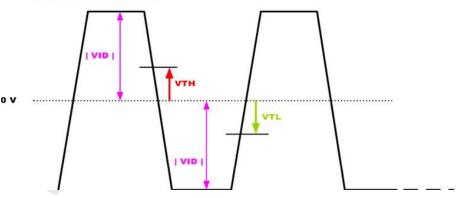

document version 1.0 12/25





G150XVN01.0

AU OPTRONICS CORPORATION

5.1.3 Backlight unit

	and motor guide motor ==== and my to an accordance at == == (not expension a).						
Symbol	Parameter	Min.	Тур.	Max.	Unit	Remark	
vcc	Input Voltage	10.8	12	13.2	[Volt]		
ICC	Input Current	-	1.1	1.3	[A]	100% PWM Duty	
PCC	Power Consumption	-	13.2	-	[Watt]	100% PWM Duty	
F _{PWM}	Dimming Frequency	200	-	20K	[Hz]		
	Swing Voltage	3	3.3	5	[Volt]		
	Dimming duty cycle	5	-	100	%		
I _F	LED Forward Current	-	110	-	[mA]	Ta = 25°C	
V _F	LED Forward Voltage	-	3.2	3.6	[Volt]	I _F = 110mA, Ta = 25°C	
P _{LED}	LED Power Consumption	-	11.264	12.672	[Watt]	I _F = 110mA, Ta = 25°C	
LED Life Time		-	50,000	-	Hrs	I _F = 110mA, Ta= 25℃	

Note 1: Ta means ambient temperature of TFT-LCD module.

Note 2: VCC, ICC, PCC are defined for LED backlight.(100% duty of PWM dimming)

Note 3: I_F , V_F are defined for one channel LED. There are four LED channels in back light unit.

Note 4: If G150XVN01.0 module is driven by high current or at high ambient temperature & humidity condition. The operating life will be reduced.

Note 5: Operating life means brightness goes down to 50% initial brightness. Minimum operating life time is estimated data.

Note 6: LED lifetime is definition: brightness is decreased to 50% of the initial value. LED lifetime is restricted under normal condition, ambient temperature = 25° C and LED operating IF = 110mA.

document version 1.0 13/25






Product Specification G150XVN01.0 AU OPTRONICS CORPORATION

6. Signal Characteristic

6.1 Pixel Format Image

Following figure shows the relationship of the input signals and LCD pixel format.

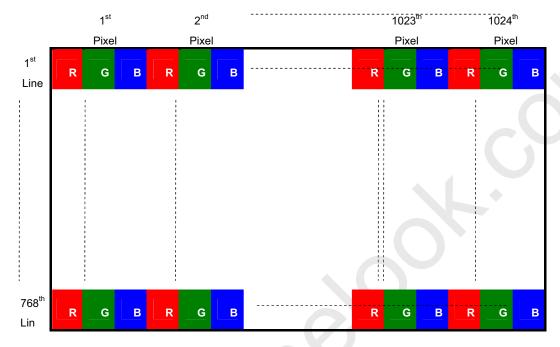


document version 1.0 14/25






G150XVN01.0

6.2 The Input Data Format

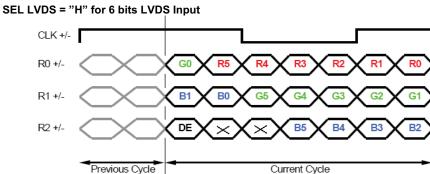

SEL LVDS = "L" or NC for 8 bits LVDS Input

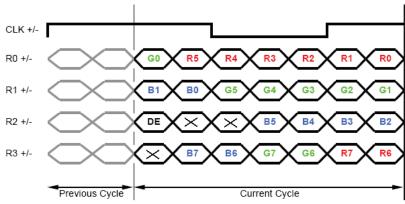

Note1: Please follow PSWG.

Note2: R/G/B data 7:MSB, R/G/B data 0:LSB (8bits LVDS input)





G150XVN01.0

AU OPTRONICS CORPORATION

6.3 Signal Description

The module using one LVDS receiver SN75LVDS82(Texas Instruments). LVDS is a differential signal technology for LCD interface and high speed data transfer device. LVDS transmitters shall be SN75LVDS83(negative edge sampling). The first LVDS port(RxOxxx) transmits odd pixels while the second LVDS port(RxExxx) transmits even pixels.

DF14H-3	DF14H-30P-1.25H (HIROSE)			
Pin No.	Symbol	Description		
1	GND	Ground		
2	GND	Ground		
3	VCC	LED BL Power Supply, 12V		
4	VCC	LED BL Power Supply, 12V		
5	GND	Ground		
6	On/Off	LED BL On/Off (3.3-5V:On, 0V:Off)		
7	PWM	LED BL PWM dimming		
8	GND	Ground		
9	VDD	LCD Power Supply, 3.3V		
10	VDD	LCD Power Supply, 3.3V		
11	GND	Ground		
12	GND	Ground		
13	Rin0-	- LVDS differential data input (R0-R5, G0)		
14	Rin0+	+ LVDS differential data input (R0-R5, G0)		
15	GND	Ground		
16	Rin1-	- LVDS differential data input (G1-G5, B0-B1)		
17	Rin1+	+ LVDS differential data input (G1-G5, B0-B1)		
18	GND	Ground		
19	Rin2-	- LVDS differential data input (B2-B5, HS, VS, DE)		
20	Rin2+	+ LVDS differential data input (B2-B5, HS, VS, DE)		
21	GND	Ground		
22	CIkIN-	- LVDS differential clock input		
23	CIkIN+	+ LVDS differential clock input		
24	GND	Ground		
25	Rin3-	- LVDS differential data input (R6-R7, G6-G7,B6-B7)		
26	Rin3+	- LVDS differential data input (R6-R7, G6-G7,B6-B7)		
27	GND	Ground		
28	RL/UD	H: 180 degree rotation/ L: Normal mode		
29	SEL LVDS	L:8 bit / H:6bit		
30	GND	Ground (Note 1)		


document version 1.0 16/25





G150XVN01.0

Note1: Start from left side

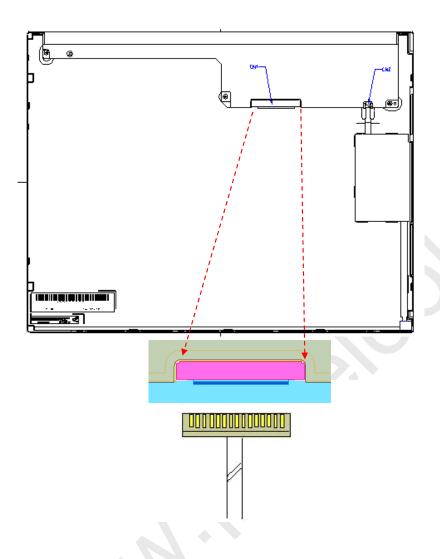



G150XVN01.0

6.4 Interface Timing


6.4.1 Timing Characteristics

Signal	Item	Symbol	Min	Тур	Max	Unit
	Period	Tv	776	-	1023	Th
Vertical	Active	Tdisp(v)	768	768	768	Th
Section	Blanking	Tbp(v)+Tfp(v)+PWvs	8	-	255	Th
11	Period	Th	1064	-	2047	Tclk
Horizontal	Active	Tdisp(h)	1024	1024	1024	Tclk
Section	Blanking	Tbp(h)+Tfp(h)+PWhs	40	-	1023	Tclk
Clock	Frequency	Freq.	50	65	81	MHz
Frame Rate	Frequency	1/Tv	50	60	75	Hz

Note: DE mode only

Note: Typical value refer to VESA STANDARD

6.4.2 Timing Diagram

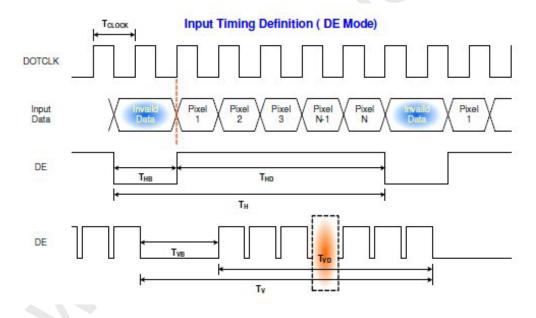






Product Specification G150XVN01.0 AU OPTRONICS CORPORATION

6.5 Power ON/OFF Sequence

VDD power and lamp on/off sequence are as follows. Interface signals are also shown in the chart. Signals from any system shall be Hi-Z state or low level when VDD is off.

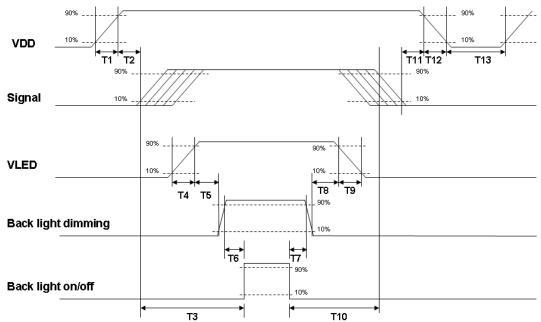

Parameter		Unit		
Parameter	Min.	Тур.	Max.	Unit
T1	0.5	-	10	[ms]
T2	30	40	50	[ms]
Т3	220	-	-	[ms]
T4	0.5	-	10	[ms]
T5	10	-	-	[ms]
Т6	10	-	-	[ms]
Т7	0	-	-	[ms]
Т8	10	-	-	[ms]
Т9	100	-	-	[ms]
T10	110	-	-	[ms]
T11	0	16	50	[ms]
T12	-	-	10	[ms]
T13	1000	-	-	[ms]

document version 1.0 19/25





G150XVN01.0

AU OPTRONICS CORPORATION

7. Connector & Pin Assignment

Physical interface is described as for the connector on module. These connectors are capable of accommodating the following signals and will be following components.

7.1 Connector

Connector Name / Designation	Interface Connector / Interface card		
Manufacturer	HIROSE		
Type Part Number	HRS DF14H-30P-1.25H		
Mating Housing Part Number	HRS DF14-30S-1.25C		

7.2 Pin Assignment

Pin#	Signal Name	Pin#	Signal Name
1	GND	16	Rin1-
2	GND	17	Rin1+
3	VCC	18	GND
4	VCC	19	Rin2-
5	GND	20	Rin2+
6	On/Off	21	GND
7	PWM	22	CIkIN-
8	GND	23	ClkIN+
9	VDD	24	GND
10	VDD	25	Rin3-
11	GND	26	Rin3+
12	GND	27	GND
13	Rin0-	28	RL/UD
14	Rin0+	29	SEL LVDS
15	GND	30	GND

document version 1.0 20/25





G150XVN01.0

AU OPTRONICS CORPORATION

8. Reliability Test

Environment test conditions are listed as following table.

No.	Test items	Conditions	Remark	
1	High temperature storage	Ta= 70℃ 240Hrs		
2	Low temperature storage	Ta= -30°C 240Hrs		
3	High temperature operation	Tgs= 70°C 240Hrs		
4	Low temperature operation	Ta= -10°C 240Hrs		
5	High temperature and high humidity	Ta= 40℃, 95% RH 240Hrs		
6	Thermal shock	-30°C/30min, 70°C/30min, 50 cycles		
7	Vibration	Acceleration: 1.5 G Wave: Random Frequency: 10 - 200 - 10 Hz Sweep: 30 Minutes each Axis (X, Y, Z)		
8	Mechanical shock	Acceleration: 50 G Wave: Half-sine Active Time: 20 ms Direction: ±X, ±Y, ±Z (one time for each Axis)		
9	Vibration (with carton)	Random vibration: 0.015G2/Hz from 5~200Hz –6dB/octave from 200~500Hz		
10	Electro Static discharge (ESD)	Contact Discharge: ±8KV, 150pF(330Ω) 1sec, 8 points, 25 times/ point. Air Discharge: ± 15KV, 150pF(330Ω) 1sec, 8 points, 25 times/ point.		

Note1: According to EN61000-4-2, ESD class B: Some performance degradation allowed. No data lost Self-recoverable. No hardware failures.

Note2:

- Water condensation is not allowed for each test items.
- Each test is done by new TFT-LCD module. Don't use the same TFT-LCD module repeatedly for reliability test.
- The reliability test is performed only to examine the TFT-LCD module capability.
- To inspect TFT-LCD module after reliability test, please store it at room temperature and room humidity for 24 hours at least in advance.
- No function failure occurs.


document version 1.0 21/25





Product Specification G150XVN01.0 AU OPTRONICS CORPORATION

9. Shipping Label

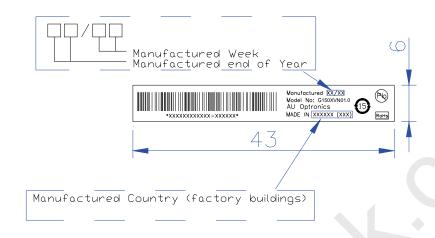

Unit: mm

document version 1.0 22/25





G150XVN01.0


AU OPTRONICS CORPORATION

10. Packing Form

10.1 Packaging Material

FILM PROTECT
BAG ANTI-STATIC
TAPE
TAPE CREPED PAPER
PACKING CARTON
LABEL SPEC
LABEL CARTON.
CUSHION PACKING

10.2 Packing Instruction

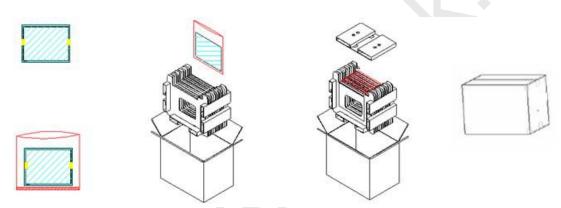

Max capacity: 10 TFT-LCD module per carton

Max weight: 12.5 kg per carton

Outside dimension of carton: 410mm(L)* 278mm(W)*360mm(H)

Pallet size: 1140 mm * 830 mm * 135mm

document version 1.0 23/25






G150XVN01.0

AU OPTRONICS CORPORATION

10.3 Palletizing

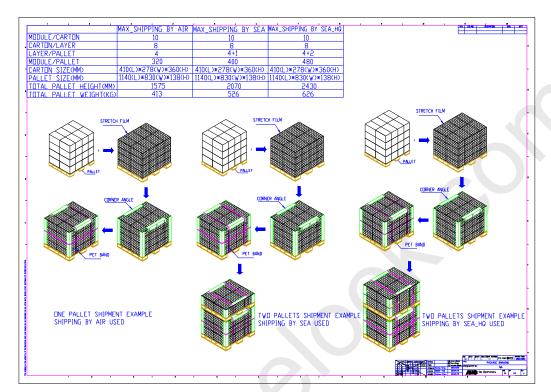

Module by air_Max : (2 *4) *4 layers , one pallet put 32 boxes , total 320pcs module Module by sea_Max : (2 *4) *4 layers + (2 *4) *1 layers , two pallet put 40 boxes , total 400pcs module Module by sea_HQ_Max : (2 *4) *4 layers+(2 *4) *2 layers, two pallet put 48 boxes, total 480pcs module

document version 1.0 24/25

②

